


MSBCCL Series

Asynchronous Three-Phase Brake Motors With Squirrel Cage Rotor - Direct Current Brake

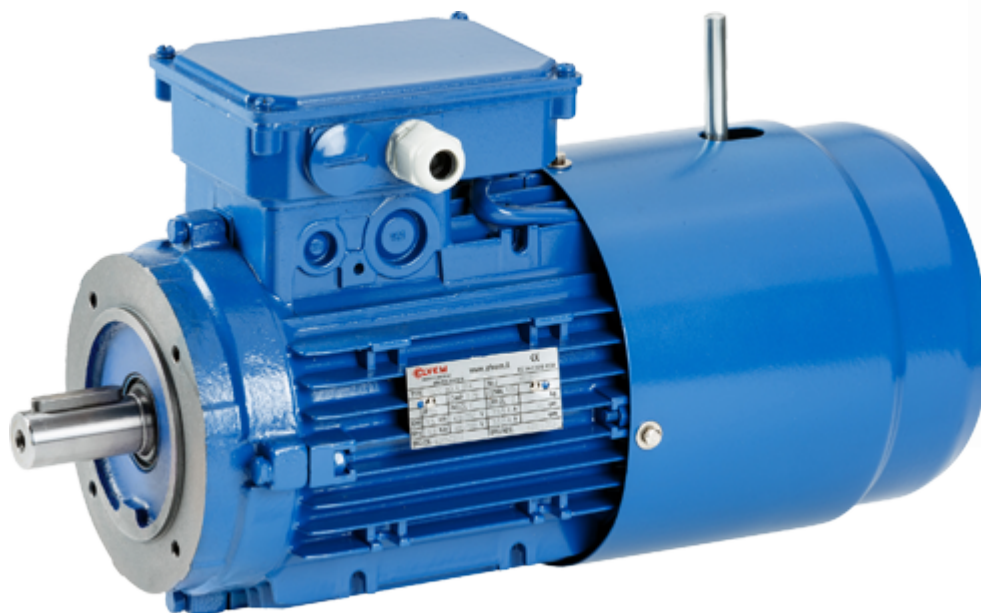

▪ MSBCCL series-enclosed construction externally ventilated-sizes 63~160

The brake-motors of the MSBCCL series result from coupling an asynchronous three-phase motor and an electromagnetic D.C. brake unit. Due to their reliability and operating safety, as well as their quick braking time (connection & disconnection time = 5~80 milliseconds) they are suitable for a great variety of applications, such as:

- Braking of loads or torques on the driving shaft.
- Braking of rotating masses to reduce any lost-time.
- Braking operations to increase the set-up precision.
- Braking of machine parts, according to safety rules.

2 poles-3000rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _{st} /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL631-2	0.18	2710	63	0.75	0.95	0.55	0.32	2.2	2.4	1.6	6	61
MSBCCL632-2	0.25	2710	65	0.78	1.23	0.71	0.41	2.2	2.4	1.6	6	61
MSBCCL633-2	0.37	2710	65	0.78	1.82	1.05	0.61	2.2	2.4	1.6	6	62
MSBCCL711-2	0.37	2730	70	0.79	1.67	0.97	0.56	2.2	2.4	1.6	6	64
MSBCCL712-2	0.55	2760	71	0.79	2.45	1.42	0.82	2.2	2.4	1.6	6	64
MSBCCL713-2	0.75	2730	72	0.82	3.18	1.83	1.06	2.2	2.4	1.5	6	65
MSBCCL801-2	0.75	2770	73	0.84	3.06	1.77	1.02	2.2	2.4	1.5	6	67
MSBCCL802-2	1.1	2770	76.2	0.83	4.35	2.51	1.45	2.2	2.4	1.5	6	67
MSBCCL803-2	1.5	2800	78.5	0.83	5.87	3.32	1.92	2.2	2.4	1.5	6	70
MSBCCL90S-2	1.5	2840	78.5	0.84	5.76	3.28	1.90	2.2	2.4	1.5	6	72
MSBCCL90L1-2	2.2	2840	81	0.85	8.0	4.61	2.66	2.2	2.4	1.4	6	72
MSBCCL90L2-2	3	2840	82.6	0.86	10.56	6.10	3.52	2.2	2.4	1.4	6	74
MSBCCL100L1-2	3	2840	82.6	0.87	10.44	6.03	3.48	2.2	2.3	1.4	7	76
MSBCCL100L2-2	4	2850	84.2	0.87	13.65	7.88	4.55	2.2	2.3	1.4	7.5	77
MSBCCL112M-2	4	2880	84.2	0.87	13.65	7.88	4.55	2.2	2.3	1.4	7.5	77
MSBCCL112L-2	5.5	2880	85.7	0.88	18.23	10.53	6.08	2.2	2.3	1.2	7.5	78
MSBCCL132S1-2	5.5	2900	85.7	0.88	18.23	10.53	6.08	2	2.2	1.2	7.5	80
MSBCCL132S2-2	7.5	2920	87	0.88	24.49	14.14	8.16	2	2.2	1.2	7.5	80
MSBCCL132M1-2	9.2	2930	88	0.89	29.87	17.25	9.96	2	2.2	1.2	7.5	81
MSBCCL132M2-2	11	2930	88.4	0.9	34.57	19.96	11.52	2	2.2	1.2	7.5	83
MSBCCL160M1-2	11	2940	88.4	0.9	34.57	19.96	11.52	2	2.2	1.2	7.5	86
MSBCCL160M2-2	15	2940	89.4	0.91	46.09	26.61	15.36	2	2.2	1.2	7.5	86
MSBCCL160L-2	18.5	2940	90	0.91	56.47	32.6	18.82	2	2.2	1.1	7.5	86

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kg m ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
MSBCCL63	K 1	5	15	0.00005	3000	45	20	10	62
MSBCCL 71	K 2	12	20	0.00014	3000	50	30	15	64
MSBCCL 80	K 3	16	25	0.00021	1300	55	30	15	67
MSBCCL 90S	K 4	20	30	0.00039	1100	65	40	15	72
● MSBCCL 90S	K 4 D	40	30	0.00078	1100	65	40	15	72
MSBCCL 90 L	K 4	20	30	0.00039	1100	65	40	15	72
● MSBCCL 90 L	K 4 D	40	30	0.00078	1100	65	40	15	72
MSBCCL 100 L	K 5	40	45	0.00104	900	75	45	20	76
● MSBCCL 100 L	K 6	60	50	0.00135	900	180	85	25	76
MSBCCL 112 MT	K 5	40	45	0.00104	880	75	45	20	77
MSBCCL 112 M	K 6	60	50	0.00135	880	180	85	25	78
MSBCCL 132 S	K 7	90	55	0.00219	480	200	95	50	80
● MSBCCL 132 S	K 7 D	180	55	0.00438	480	200	95	50	80
MSBCCL 132 M	K 7	90	55	0.00219	450	200	95	50	80
● MSBCCL 132 M	K 7 D	180	55	0.00438	480	200	95	50	80
MSBCCL 160 MT	K 7 D	180	55	0.00438	350	200	95	50	86
MSBCCL 160 L	K 8	200	60	0.00408	350	210	100	60	86
● MSBCCL 160 L	K 8 D	400	60	0.00816	350	210	100	60	86

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.



Technical Features

4 poles-1500rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _{st} /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL631-4	0.12	1350	57	0.64	0.82	0.47	0.27	2.2	2.4	1.7	6	52
MSBCCL632-4	0.18	1350	59	0.65	1.17	0.68	0.39	2.2	2.4	1.7	6	52
MSBCCL633-4	0.25	1350	60	0.66	1.58	0.91	0.53	2.2	2.4	1.7	6	54
MSBCCL711-4	0.25	1350	60	0.72	1.45	0.84	0.48	2.2	2.4	1.7	6	55
MSBCCL712-4	0.37	1370	65	0.74	1.92	1.11	0.64	2.2	2.4	1.7	6	55
MSBCCL713-4	0.55	1380	66	0.75	2.78	1.60	0.93	2.2	2.4	1.7	6	57
MSBCCL801-4	0.55	1370	67	0.75	2.74	1.58	0.91	2.2	2.4	1.7	6	58
MSBCCL802-4	0.75	1380	72	0.78	3.34	1.93	1.11	2.2	2.4	1.6	6	58
MSBCCL803-4	1.1	1390	76.2	0.78	4.63	2.67	1.54	2.2	2.4	1.6	6	60
MSBCCL90S-4	1.1	1400	76.2	0.79	4.57	2.64	1.52	2.2	2.4	1.6	6	61
MSBCCL90L-4	1.5	1400	78.5	0.8	5.97	3.45	1.99	2.2	2.4	1.6	6	61
MSBCCL90L2-4	2.2	1400	81	0.8	8.45	4.90	2.83	2.2	2.4	1.5	7	63
MSBCCL100L1-4	2.2	1420	81	0.81	8.38	4.84	2.79	2.2	2.3	1.5	7	64
MSBCCL100L2-4	3	1420	82.6	0.81	11.21	6.47	3.74	2.2	2.3	1.5	7	64
MSBCCL100L3-4	4	1430	84.2	0.82	14.18	8.36	4.83	2.2	2.3	1.5	7	65
MSBCCL112M-4	4	1430	84.2	0.83	14.31	8.26	4.77	2.2	2.2	1.5	7	65
MSBCCL112L-4	5.5	1440	85.7	0.83	19.33	11.16	6.44	2.2	2.2	1.4	7	68
MSBCCL132S-4	5.5	1450	85.7	0.84	19.1	11.03	6.37	2.2	2.2	1.4	7	71
MSBCCL132M-4	7.5	1450	87	0.85	25.35	14.64	8.45	2.2	2.2	1.4	7	71
MSBCCL132L1-4	9.2	1460	87.5	0.85	30.92	17.85	10.31	2.2	2.2	1.4	7.5	74
MSBCCL132L2-4	10	1460	88	0.85	33.42	19.3	11.14	2.2	2.2	1.4	7.5	74
MSBCCL132L2-4	11	1460	88.4	0.86	36.17	20.88	12.06	2.2	2.2	1.4	7.5	74
MSBCCL160M-4	11	1460	88.4	0.87	35.76	20.64	11.92	2.2	2.2	1.4	7	75
MSBCCL160L-4	15	1460	88.4	0.87	48.76	28.15	16.25	2.2	2.2	1.4	7.5	75

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kg m ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
MSBCCL63	K 1	5	15	0.00005	3000	45	20	10	52
MSBCCL 71	K 2	12	20	0.00014	3000	50	30	15	55
MSBCCL 80	K 3	16	25	0.00021	1300	55	30	15	58
MSBCCL 90S	K 4	20	30	0.00039	1100	65	40	15	61
●MSBCCL 90S	K 4 D	40	30	0.00078	1100	65	40	15	61
MSBCCL 90 L	K 4	20	30	0.00039	1100	65	40	15	63
●MSBCCL 90 L	K 4 D	40	30	0.00078	1100	65	40	15	63
MSBCCL 100 L	K 5	40	45	0.00104	900	75	45	20	64
●MSBCCL 100 L	K 6	60	50	0.00135	900	180	85	25	65
MSBCCL 112 MT	K 5	40	45	0.00104	880	75	45	20	65
MSBCCL 112 M	K 6	60	50	0.00135	880	180	85	25	65
MSBCCL 132 S	K 7	90	55	0.00219	480	200	95	50	71
●MSBCCL 132 S	K 7 D	180	55	0.00438	480	200	95	50	71
MSBCCL 132 M	K 7	90	55	0.00219	450	200	95	50	71
●MSBCCL 132 M	K 7 D	180	55	0.00438	480	200	95	50	71
MSBCCL 160 MT	K 7 D	180	55	0.00438	350	200	95	50	75
MSBCCL 160 L	K 8	200	60	0.00408	350	210	100	60	75
●MSBCCL 160 L	K 8 D	400	60	0.00816	350	210	100	60	75

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.

6 poles-1000rpm-50Hz

Brake motors have a $\pm 6\%$ tolerance on the supply voltage

Model	Power (KW)	Speed (r/min)	Eff. (%)	Power Factor (CosΦ)	Current (A)			T _{st} /T _n (Times)	T _{max} /T _n (Times)	T _{min} /T _n (Times)	I _{st} /I _n (Times)	Noise dB(A)
					230V	400V	690V					
MSBCCL631-6	0.09	840	42	0.61	0.88	0.51	0.29	2	2	1.5	3.5	50
MSBCCL632-6	0.12	850	45	0.62	1.08	0.62	0.36	2	2	1.5	3.5	50
MSBCCL711-6	0.18	880	56	0.66	1.22	0.70	0.41	1.6	1.7	1.5	4	52
MSBCCL712-6	0.25	900	59	0.7	1.51	0.87	0.50	2.1	2.2	1.5	4	52
MSBCCL713-6	0.37	890	61	0.69	2.2	1.27	0.73	2	2.1	1.5	4	54
MSBCCL801-6	0.37	900	62	0.7	2.13	1.23	0.71	1.9	1.9	1.5	4	56
MSBCCL802-6	0.55	900	67	0.72	2.85	1.65	0.95	2	2.3	1.5	4	56
MSBCCL803-6	0.75	900	68	0.72	3.83	2.21	1.28	2	2.3	1.5	4	58
MSBCCL90S-6	0.75	920	69	0.72	3.77	2.18	1.26	2.2	2.2	1.5	5.5	59
MSBCCL90L-6	1.1	925	72	0.73	5.23	3.02	1.74	2.2	2.2	1.3	5.5	59
MSBCCL100L-6	1.5	945	74	0.76	6.67	3.85	2.22	2.2	2.2	1.3	6	61
MSBCCL112M-6	2.2	955	78	0.76	9.28	5.36	3.09	2.2	2.2	1.3	6	64
MSBCCL132S-6	3	960	79	0.76	12.49	7.21	4.16	2	2	1.3	6.5	64
MSBCCL132M1-6	4	960	80.5	0.76	16.35	9.44	5.45	2	2	1.3	6.5	68
MSBCCL132M2-6	5.5	960	83	0.77	21.51	12.42	7.17	2	2	1.3	6.5	68
MSBCCL132L-6	7.5	960	85	0.77	28.65	16.54	9.55	2	2	1.3	6.5	68
MSBCCL160M-6	7.5	960	86	0.8	27.25	15.73	9.08	2	2.2	1.3	6.5	68
MSBCCL160L-6	11	960	87.5	0.79	39.78	22.97	13.26	2	2.2	1.2	6.5	73

Type	Brake Type K	Brake Torque Nm	Brake Rated Power W	J Brake Pd ² Kg m ²	No. of Starts/hr. Under No Load	Delayed Cut-in Time ★ Msec.	Quick Cut-in Time Msec.	Cut Out Time Msec.	Noise dB(A)
MSBCCL63	K 1	5	15	0.00005	3000	45	20	10	50
MSBCCL 71	K 2	12	20	0.00014	3000	50	30	15	52
MSBCCL 80	K 3	16	25	0.00021	1300	55	30	15	56
MSBCCL 90S	K 4	20	30	0.00039	1100	65	40	15	59
●MSBCCL 90S	K 4 D	40	30	0.00078	1100	65	40	15	59
MSBCCL 90 L	K 4	20	30	0.00039	1100	65	40	15	59
●MSBCCL 90 L	K 4 D	40	30	0.00078	1100	65	40	15	59
MSBCCL 100 L	K 5	40	45	0.00104	900	75	45	20	61
●MSBCCL 100 L	K 6	60	50	0.00135	900	180	85	25	61
MSBCCL 112 MT	K 5	40	45	0.00104	880	75	45	20	64
MSBCCL 112 M	K 6	60	50	0.00135	880	180	85	25	64
MSBCCL 132 S	K 7	90	55	0.00219	480	200	95	50	64
●MSBCCL 132 S	K 7 D	180	55	0.00438	480	200	95	50	64
MSBCCL 132 M	K 7	90	55	0.00219	450	200	95	50	68
●MSBCCL 132 M	K 7 D	180	55	0.00438	480	200	95	50	68
MSBCCL 160 MT	K 7 D	180	55	0.00438	350	200	95	50	68
MSBCCL 160 L	K 8	200	60	0.00408	350	210	100	60	73
●MSBCCL 160 L	K 8 D	400	60	0.00816	350	210	100	60	73

● Motor with increased braking torque on request

★ On request, delayed brake cut in time for lifting equipments. We suggest double disk brake D for lifting equipments.

MSBCCL Series Brake Motors

Operating Principle

The direct current brake is fed by means of an electronic circuit with diode bridge (rectifier) situated inside the terminal-box. When feeding the electromagnet (5), the movable anchor (4) is attracted towards the same, thus loading the braking torque springs (9) and allowing the disk (2), equipped with friction packing and fitted on the groove hub (6) to turn solitary the motor shaft (1) by means of a key (7). By interrupting the feeding, the movable anchor (4), pushed by the braking torque springs (9), exerts a pressure upon the friction surface of the disk (2), thus causing its stopping.

Adjustment Of The Air Gap

The air gap (11) is the distance between the electromagnet (5) and the movable anchor (9).

The air gap has to be regularly checked, since due to the wear of the friction packing (2) it tends to increase.

Act on the brake adjusters (3) after having unloosen the screws (8) to bring the air gap to the required value.





Act on the ring nut (10) which acts on the braking torque springs (9) to adjust the braking torque.

Pls. contact our technical department for information on the air gap adjustment values.

Hand Release With Lever

Upon request a hand release with lever can be supplied.

In case of a current cutoff, acting on the lever (12), the release, connected to the movable anchor (4) overcomes the springs pressure, thus detaching the movable anchor from the disc friction packing (2) allowing the shaft to turn.

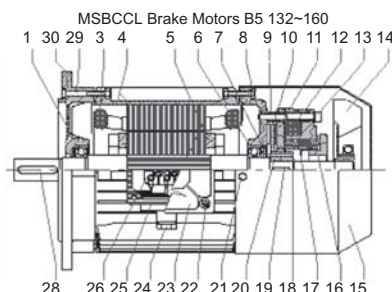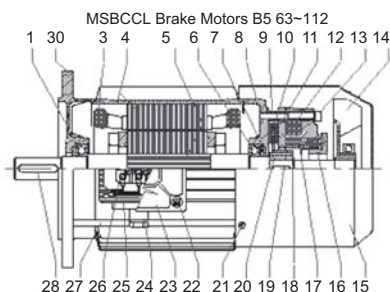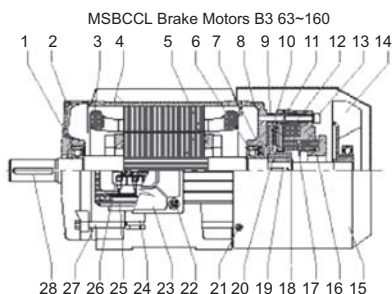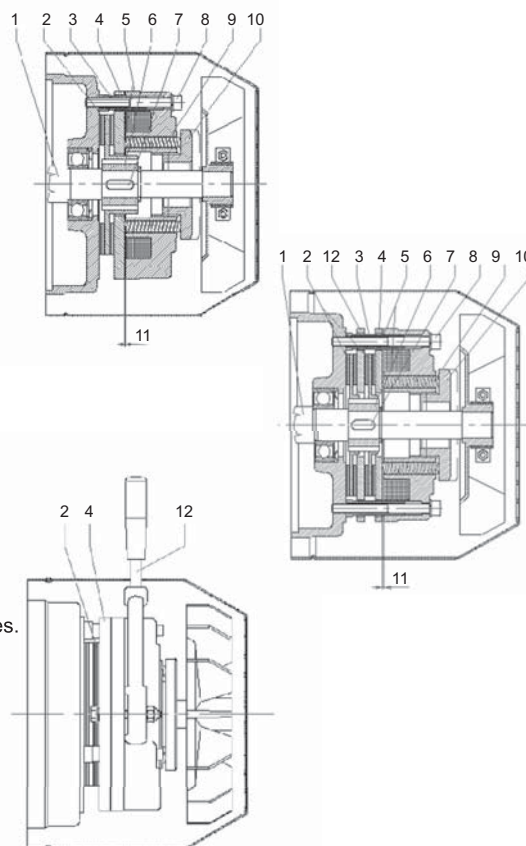

Spare Parts

1. Front bearing
2. Front shield
3. Winding
4. Frame with stator package
5. Shaft with rotor
6. Rear bearing
7. Spring
8. Rear shield
9. Adjusting bush
10. Brake disc
11. Moving anchor
12. Electromagnet coil with diode
13. Fixing screws for brake
14. Cooling fan
15. Fan hood
16. Ring nut
17. Spring
18. See gearing
19. Key brake side
20. Toothed pinion
21. Fixing screw for fan hood
22. Fixing crew for terminal-box
23. Terminal-box
24. Able-holder
25. Packing
26. Terminal-block
27. Tie-bolt
28. Coupling side key
29. Fixing screw for shield
30. Flange shield